


VGC1000S

Standby power : 1000KVA/800KW

Prime power : 910KVA/728KW

Standard features

- Engine : CUMMINS , QST30-G3
- Charge alternator : 24V
- Governor : ECM
- Alternator : STAMFORD , HCI634H
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

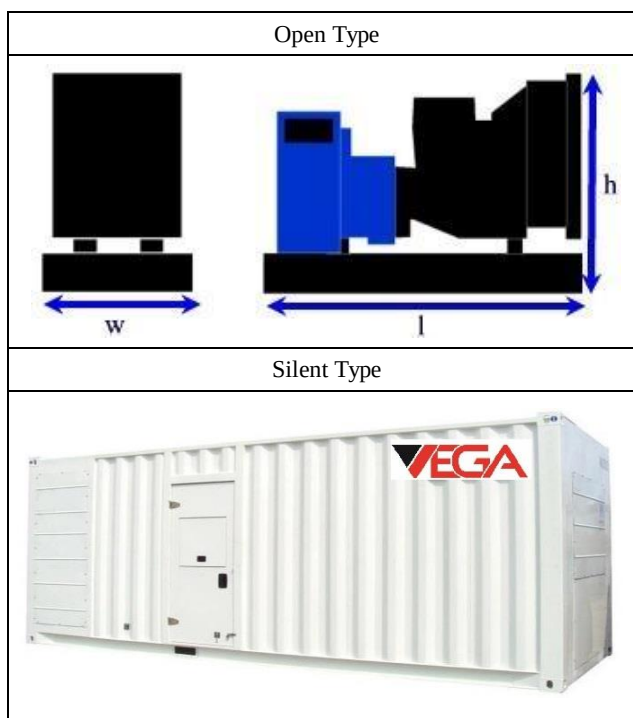

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	4023mm×1756mm×2258mm	6036 Kg
Container Type	6058mm×2438mm×2591mm	9214Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	1443	1000/800	910/728

Engine Data

Manufacturer/Model	CUMMINS QST30-G3 4-cycle
Cylinder /Arrangement	12 / 50° V
Displacement	30.48 L
Bore and Stroke	140 mm×165 mm
Compression ratio	14.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	895KW
Frequency regulation , steady state	≤ 1%
Governor : type	ECM

Exhaust System

Exhaust gas flow	2720 L/s
Exhaust temperature	563°C
Max back pressure	76 mmHg

Fuel System

Fuel consumption 100% (of the Prime Power)	184 L / h
--	-----------

Oil system

Total oil capacity w/filters	133 L
------------------------------	-------

Air intake

Engine air flow	935 L/s
-----------------	---------

Coolant System

Radiator & engine capacity	85 L
Max water temperature	104°C
Thermostat	82-95°C

Alternator Data

Manufacturer / Type	STAMFORD / HCI634H
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEESEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.