


VGC1240S

Standby power : 1250KVA/1000KW

Prime power : 1125KVA/900KW

Standard features

- Engine : CUMMINS ,KTA38-G9
- Charge alternator : 24V
- Governor : Electrical
- Alternator : STAMFORD , HCI634K
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

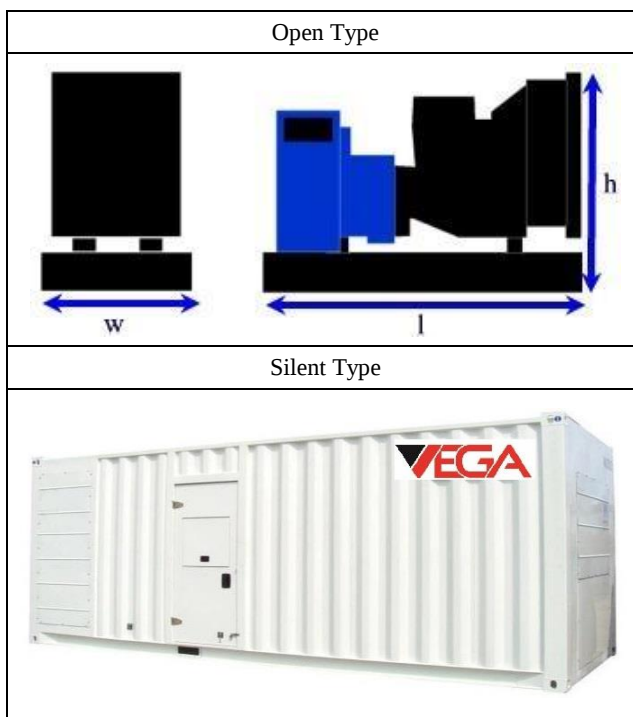

Weight and Dimensions

GEN-Set	Dimension (L × W × H)	Weight
Open Type	4382mm × 2066mm × 2352mm	7897 Kg
Container Type	12192mm × 2438mm × 2896mm	14847Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	1804	1250/1000	1125/900

Engine Data

Manufacturer/Model	CUMMINS KTA38-G9 4-cycle
Cylinder /Arrangement	12 / 60° V
Displacement	37.8 L
Bore and Stroke	159 mm × 159 mm
Compression ratio	13.9 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1089KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	3540 L/s
Exhaust temperature	529°C

Max back pressure	76 mmHg
-------------------	---------

Fuel System

Fuel consumption 100% (of the Prime Power)	256 L / h
--	-----------

Oil system

Total oil capacity w/filters	135 L
------------------------------	-------

Air intake

Engine air flow	1309 L/s
-----------------	----------

Coolant System

Radiator & engine capacity	124 L
Max water temperature	104°C
Thermostat	82-93°C

Alternator Data

Manufacturer / Type	STAMFORD / HCI634K
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEESEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.