


VGC1675S

Standby power: 1675 kVA/1340 kW

Prime power: 1500 kVA/1200 kW

Standard features

- Engine : CUMMINS, KTA50-GS8 (India)
- Charge alternator : 24V
- Governor : Electrical
- Alternator : STAMFORD , PI734C (UK)
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

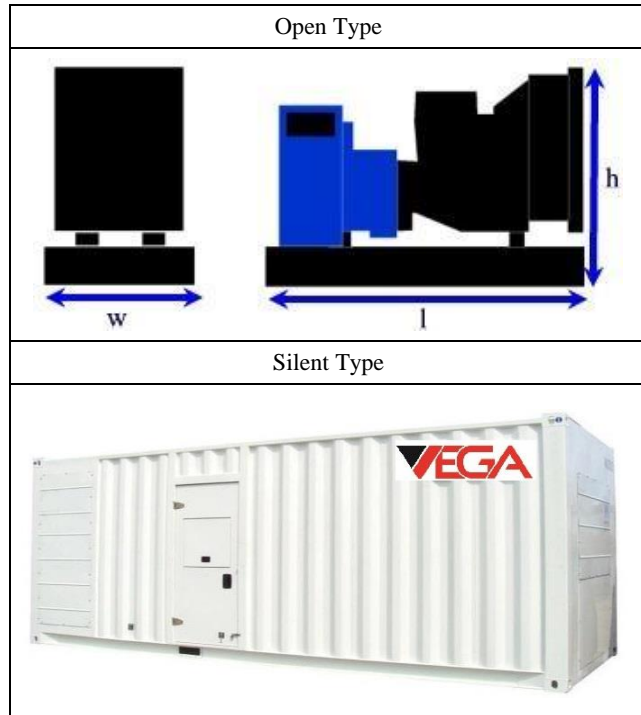

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	5454mm×2020mm×2441mm	10639 Kg
Container Type	12192mm×2438mm×2896mm	17589 Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (kVA/kW)	Prime Rating (kVA/kW)
400/230	50	3	0.8	2417	1675/1340	1500/1200

Engine Data

Manufacturer/Model	CUMMINS KTA50-GS8 4-cycle
Cylinder /Arrangement	16 / 60° V
Displacement	50.3 L
Bore and Stroke	159 mm×159 mm
Compression ratio	14.9 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1429KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	4350 L/s
Exhaust temperature	510°C
Max back pressure	51mmHg

Fuel System

Fuel consumption 100%	309 L/h
Fuel consumption 750%	238 L/h
Fuel consumption 50%	167 L/h
Fuel consumption 25%	88 L/h

Oil system

Total oil capacity w/filters	204 L
------------------------------	-------

Air intake

Engine air flow	1655 L/s
-----------------	----------

Coolant System

Radiator & engine capacity	165 L
Max water temperature	104°C
Thermostat	82-93°C

Alternator Data

Manufacturer / Type	STAMFORD / PI734C
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE8610 is made by DEEPSEA in UK and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter

Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.