


VGC2500S

Standby power : 2420KVA/1936KW

Prime power : 2000KVA/1600KW

Standard features

- Engine : CUMMINS , QSK60-G13
- Charge alternator : 24V
- Governor : ECM
- Alternator : STAMFORD , PI734G
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

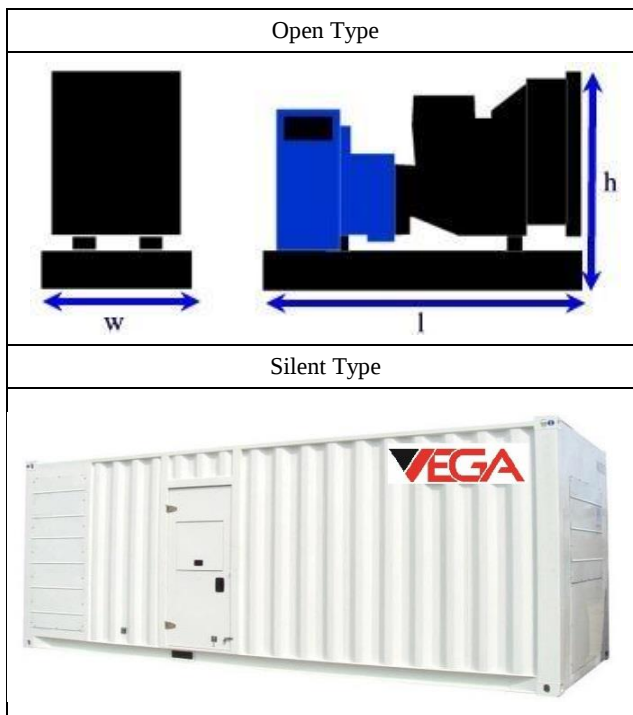

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	5922mm×2590mm×2766mm	14500 Kg
Container Type	12000mm×3200mm×3670mm	22080 Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
380/220	60	3	0.8	3493	2420/1936	2000/1600

Engine Data

Manufacturer/Model	CUMMINS QSK60-G13 4-cycle
Cylinder /Arrangement	16 /60° V
Displacement	60.2 L
Bore and Stroke	159 mm×190 mm
Compression ratio	14.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	2146KW
Frequency regulation , steady state	≤ 1%
Governor : type	ECM

Exhaust System

Exhaust gas flow	6553 L/s
Exhaust temperature	507°C

Max back pressure	6.8 kpa
-------------------	---------

Fuel System

Fuel consumption 100% (of the Prime Power)	399 L / h
--	-----------

Oil system

Total oil capacity w/filters	280 L
------------------------------	-------

Air intake

Engine air flow	2573 L/s
-----------------	----------

Coolant System

Radiator & engine capacity	159 L
Max water temperature	104°C
Thermostat	82-93°C

Alternator Data

Manufacturer / Type	STAMFORD / PI734G
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.