


VGM1100S

Standby power : 1100KVA/880KW

Prime power : 1000KVA/800KW

Standard features

- Engine : MITSUBISHI , S12H-PTA
- Charge alternator : 24V
- Governor : Electronic
- Alternator : STAMFORD , HCI634J
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

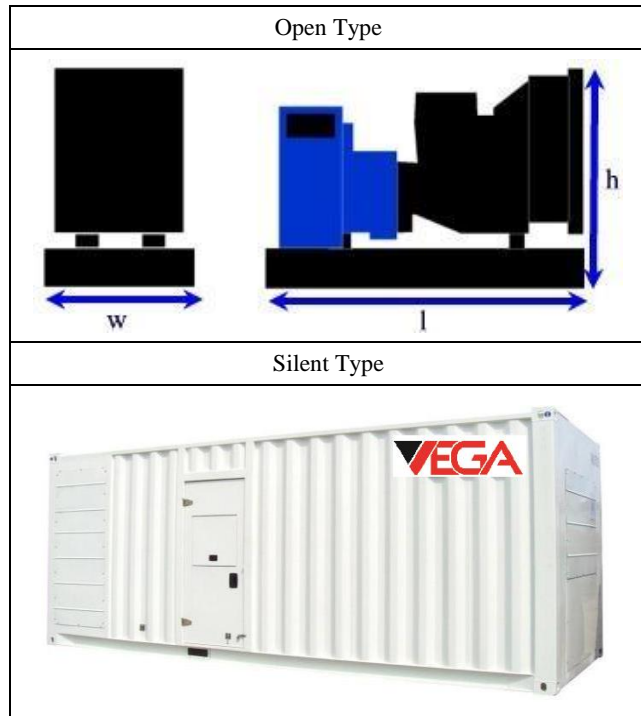

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	4259mm*2100mm*2342mm	7669kg
Silent Type	6058mm*2438mm*2591mm	10847kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	1588	1100/880	1000/800

Engine Data

Manufacturer/Model	MITSUBISHI S12H-PTA 4-cycle
Cylinder /Arrangement	12 / 60° V
Displacement	37.11 L
Bore and Stroke	150 mm×175 mm
Compression ratio	14.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1020 KW
Frequency regulation , steady state	±0.25 %
Governor : type	Electronic

Exhaust System

Exhaust gas flow	220 m ³ /min
Exhaust temperature	510°C

Max back pressure	600mm H ₂ O
-------------------	------------------------

Fuel System

Fuel consumption 100% (of the Prime Power)	204 L / h
--	-----------

Oil system

Total oil capacity w/filters	200 L
------------------------------	-------

Air intake

Engine air flow	83 m ³ /min
-----------------	------------------------

Coolant System

Radiator & engine capacity	224 L
Max water temperature	98°C
Thermostat	71-85°C

Alternator Data

Manufacturer / Type	STAMFORD , HCI634J
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.