


VGM2500S

Standby power : 2420KVA/1936KW

Prime power : 2200KVA/1760KW

Standard features

- Engine : MITSUBISHI , S16R2-PTAW
- Charge alternator : 24V
- Governor : Electronic
- Alternator : STAMFORD , PI734G
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 45°C max with coolant cap
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

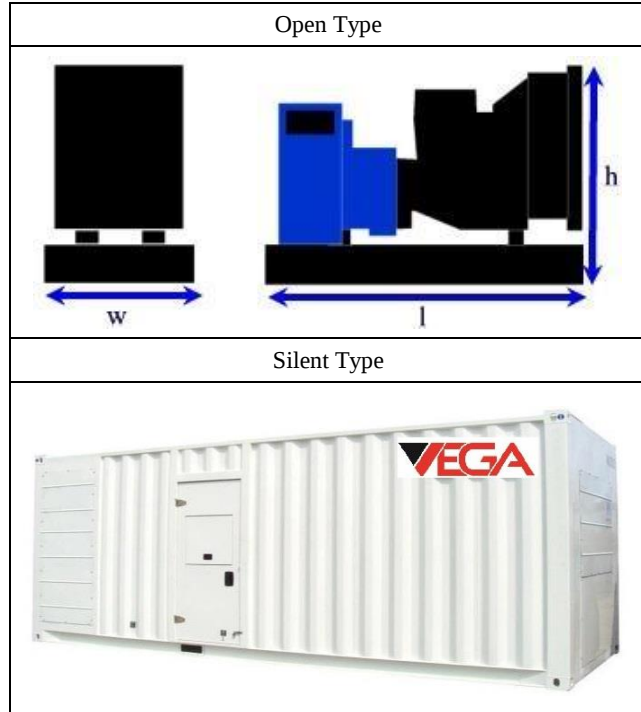

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	5979 mm×2110 mm×2513mm	18600 kg
Silent Type(non-standard)	12192mm×2438mm×2896mm	25550 kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	3493	2420/1936	2200/1760

Engine Data

Manufacturer/Model	MITSUBISHI S16R2-PTAW 4-cycle
Cylinder /Arrangement	16 / 60° V
Displacement	79.9 L
Bore and Stroke	170 mm×220 mm
Compression ratio	14.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	2167 KW
Frequency regulation , steady state	±0.25 %
Governor : type	Electronic

Exhaust System

Exhaust gas flow	498 m ³ /min
------------------	-------------------------

Exhaust temperature	479.8°C
Max back pressure	600mm H ₂ O

Fuel System

Fuel consumption 100% (of the Prime Power)	473 L/h
--	---------

Oil system

Total oil capacity w/filters	290 L
------------------------------	-------

Air intake

Engine air flow	188 m ³ /min
-----------------	-------------------------

Coolant System

Radiator & engine capacity	157 L (Engine only)
Max water temperature	98°C
Thermostat	71-85°C

Alternator Data

Manufacturer / Type	STAMFORD PI 734G
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.