### **DATA SHEET**

## The power for the better life

DIESEL GENERATOR SET 50Hz/1500 rpm

# **VGC1660S**

Standby power: 1660KVA/1328KW Prime power: 1500KVA/1200KW

#### **Standard features**

• Engine: CUMMINS, KTA50-GS8

Charge alternator : 24VGovernor : Electrical

Alternator: STAMFORD, PI734CSingle bearing alternator IP 23

Insulation class H/H

• Radiator 50°C max with coolant cap


Skid and vibration isolators

Dry type air filter

Main line circuit breaker

24V battery and cable

User's manual

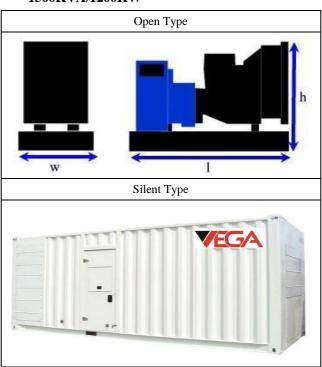

#### Weight and Dimensions

GEN-Set	Dimension ( L×W×H )	Weight
Open Type	5454mm×2020mm×2441mm	10639 Kg
Container Type	12192mm×2438mm×2896mm	17589 Kg

#### **Generator Ratings**

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	2396	1660/1328	1500/1200

#### **Engine Data**

Manufacturer/Model	CUMMINS KTA50-GS8 4-cycle
Cylinder /Arrangement	16 / 60° V
Displacement	50.3 L
Bore and Stroke	159 mm×159 mm
Compression ratio	14.9 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1429KW
Frequency regulation, steady state	≤ 1%
Governor: type	Electrical

#### **Exhaust System**

Exhaust gas flow	4350 L/s
Exhaust temperature	510℃
Max back pressure	51mmHg



#### **DATA SHEET**

#### The power for the better life

# DIESEL GENERATOR SET 50Hz/1500 rpm

#### **Fuel System**

Fuel consumption 100% (of the Prime Power)	309 L / h	
Oil system		
Total oil capacity w/filters	204 L	
Air intake		
Engine air flow	1655 L/s	
Coolant System		
Radiator & engine capacity	165 L	
Max water temperature	104℃	
Thermostat	82-93℃	

#### **Alternator Data**

Manufacturer / Type	STAMFORD / PI734C
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation: class, temperature rise	H/H
protection	IP23

#### **Control panel**



The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB,RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.