

**VGD248M 50Hz POWER BY DOOSAN SERIES****General feature:**

- ◆ Assembled by Doosan diesel engine and Mecc Alte alternator.
- ◆ Three filters as standard, fuel and water separator as optional.
- ◆ Radiator and fan with safety guard.
- ◆ Single bearing alternator IP 23, Insulation Class H.
- ◆ Heavy duty steel as base frame and 8hrs operation base fuel tank.
- ◆ Automatic control panel and 3 poles circuit breaker, internal cable.
- ◆ 12V or 24V battery, battery wires.
- ◆ Battery charger and float battery charger as standard supply scope.
- ◆ Optional soundproof canopy, ATS, synchronization panel, movable trailers.

**Generator general data:**

Genset Model	VGD248M
Prime Power(50HZ)	180KW/225KVA
Standby Power(50HZ)	198KW/248KVA
Frequency/Speed	50Hz/1500rpm
Standard Voltage	230V/400V
Phases	Three phases, four wires
Manufacturer	Vega Power International PTE.LTD

(1) PRP: Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1. A 10% overload capability is available for a period of 1 hour within 12-hour period of operation. In accordance with ISO 3046-1.

(2) ESP: The Standby Power Rating is applicable for supplying emergency power in variable load applications for up to 200 hours per year in accordance with ISO8528-1. Overload is not allowed.



# DATA SHEET

The power for the better life

DIESEL GENERATOR SET  
50Hz/1500 rpm

## Doosan Engine data

Manufacturer	Doosan Infracore Co.,Ltd.
Model	DP086LA
Engine speed	1500rpm
Engine power	
Standby power( kWm/PS)	224/305
Prime power( kWm/PS)	201/273
Type	In-line 4cycle, water cooled , 6 cylinder
Aspiration	Turbo charged & intercooled
Bore * Stroke	111*139 mm
Cubic capacity	8.071 L
Compression ratio	16.7 : 1

## Fuel Consumption:

Load	Type of operation and application	
	Prime power (l/hr)	Standby power (l/hr)
100%	48,7	54,4
75%	36,8	39,8
50%	24,6	26
25%	13	13,8

## Lubrication system:

○ Lub. Method	Fully forced pressure feed type
○ Oil pump	Gear type driven by crankshaft
○ Oil filter	Full flow, cartridge type
○ Oil Pan capacity	High level 15.5 liters Low level 12 liters
○ Angularity limit	Front down 15 deg., Front up 15 deg. , Side to side 15 deg.

Vega Power International PTE.LTD

Website: <http://www.vegapower.sg>

Add: 16 Raffles Quay #33-02 Hong Leong Building, Singapore 048581.

Tel: +65-6222 7445 | Fax: +65-6222 7421



# DATA SHEET

The power for the better life

**DIESEL GENERATOR SET**  
**50Hz/1500 rpm**

## Fuel system:

○ Injection pump	Bosch type in-line pump
○ Governor	Electric type
○ Feed pump	Mechanical type in injpump
○ Injection nozzle	Multi hole type
○ Opening pressure	21.0 Mpa
○ Fuel filter	Full flow, cartridge type with water drain valve.
○ Used fuel	Diesel fuel oil

## Cooling system:

○ Cooling method	Fresh water forced circulation
○ Cooling capacity	Engine Only : Approx. 14 lit., With Radiator : Approx lit.(standard)
○ Coolant flow rate	166 liters / min
○ Pressure Cap	Max. 49 kPa
○ Water pump	Centrifugal type driven by belt
○ Water Temperature	
Maximum for standby and Prime	103°C
Before start of full load	40°C
○ Thermostat Type and Range	Wax – pellet type Opening temp. 71°C Full open temp. 85°C
○ Cooling fan	Blower type, plastic 660 mm diameter, 7 blade

## Electric system:

○ Charging Alternator	28.5V x 45A
○ Voltage regulator	Built-in type IC regulator
○ Battery Voltage	24V
○ starting motor	24V x 6.0kW


## Alternator Specifications:

Manufacturer	Mecc Alte S.p.A.
Model Output	ECO38-3S/4A
power AVR	225KVA
model	DSR
Number of phase Power	3
factor (Cos Phi) Altitude	0,8
Overspeed Overload	≤ 1000 m 2250RPM
long-term	1 hour in a 6 hours period 110% rated load
Overload per 20 sec.	300,0
Balancing	ISO1940-1 4
Number of Pole	H
Insulation class	±1%
Accuracy	< 2%
Telephone Interference (THF)	
Waveform Distors.(THD) at full load	2,3 / 2,4
Waveform Distors.(THD) at no load	1,7 / 1,8

## Alternator general data:

- ♦ Operate either 50Hz or 60Hz.
- ♦ Standard enclosure IP23
- ♦ Insulation class H.
- ♦ Shunt excitataion systems.
- ♦ AREP or PMG system for options.
- ♦ Automatic voltage regulator
- ♦ Single bearing alternator
- ♦ Stator grease insulation covered
- ♦ Rotator and excitation high polymer
- ♦ Resist the corruption oil and acid
- ♦ Rotator balance is in accordance with BS5625 standard 12.5
- ♦ High-quality lubrication sealed long-time bearing
- ♦ Rotator silicon steel close tight


## Circuit breaker specification:

	Manufacturer	Delixi group
	Brand	Delixi
	Model	DZ20Y-400/400 3300
	Capacity	400amp

## Starting Battery specification:

	Battery Voltage	12V
	Battery Capacity	150AH
	Quantity	2pcs
	Battery type	Free maintenance, sealed lead-acid type

## Controller system

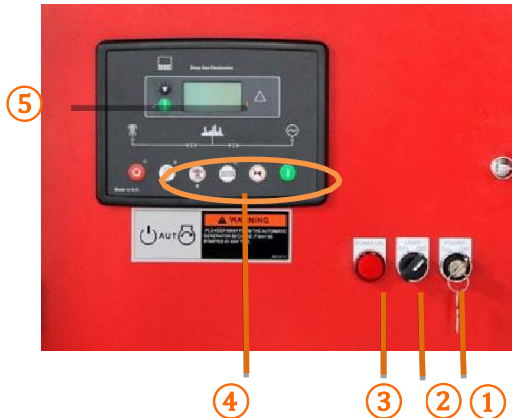

### Deepsea 6120

#### Auto start and stop control panel



**Deepsea 6120** is an auto mains failure controller for single generator, it can monitor and protect the generator working all the time. it has a LCD display which clearly shows the status of the engine. this controller include seven inputs and six outputs. This controller can also be programmed using the frong panel or by using DSE configuration Suite PC software.

#### Parameters:

This controller can provide Generator frequency, Under/over speed, Generator volts, Generator current, Engine oil pressure, Engine coolant temperature, Flexible fuel level, Hours run counter, Battery volts, Fail to start/stop, Emergency Stop. Failed to reach loading voltage/frequency, Charge fail, Loss of magnetic pick- up signal, Low DC voltage, CAN diagnostics and CAN fail/error, Mains volts 3 phase, Mains frequency, AMF indications

#### Protection:

- ◆Low Oil Pressure
- ◆High water Temperature
- ◆High voltage and low voltage
- ◆Overspeed

- ◆Volt adjuster and frequency adjuster.

- ◆Emergency stop

- ◆Fail to start

#### Features:

- ◆Protection: Automatic start/stop, load transfer and alarming of generator;
- ◆CAN and magnetic pick-up versions.
- ◆PC and front panel configurable
- ◆4 digital inputs and 3 analogue inputs.
- ◆6 outputs(4 configurable on magnetic pick-up, 6 configurable on Canbus version).
- ◆3 phase generator and mains voltage monitoring.
- ◆remote start on or off load.
- ◆advanced metering capability.
- ◆test button.
- ◆protected solid state outputs.
- ◆transfer between mains and generator power.
- ◆user-friendly set-up and button layout.
- ◆multiple engine parameters are monitored simultaneously.
- ◆module can be configured to suit individual applications.
- ◆IP 65 rating offers advanced resistance to water ingress when gasket is fitted.

- ① Power switch
- ② Lamp switch
- ③ Power indicator
- ④ Operation buttons
- ⑤ LCD display

## Enclosure Specification:


- ★ multi-way air intake and exhaust guarantee the power performance of the generator.
- ★ large-scale impedance combined type silencer effectively reduce noise of the generator.
- ★ internal high performance rubber damper and flexible materials reduce vibration.
- ★ Base mounted fuel tank supports the generator running for 8 hours.
- ★ Cold steel materials of the canopy.
- ★ Best powder paint.
- ★ Zinc plated and Corrosion resistance.
- ★ Elegant appearance and reliable quality.
- ★ Stainless steel locks and hinges.
- ★ Access to all weather conditions.
- ★ Fireproof, waterproof and dustproof.
- ★ High quality soundproof materials could efficiently reduce noise.
- ★ Big base fuel tank in the frame guarantee sufficient diesel supply.
- ★ 180° revolvable and disassemble door for easy maintenance.
- ★ Concave lockable access door for easy operation and indefectible.
- ★ Lights inside of the canopy for maintenance.



- ★ Transparent viewing window make the control panel clear at a glance.
- ★ Emergency stop button mounted on the canopy exterior for urgency.
- ★ Cooling fluid injection hole is kept on the ceiling crust.
- ★ Pipe of lube oil and cooling fluid is mounted on the bottom of generator for easy let.
- ★ Fuel fill and battery can easy be accessed by lockable door.
- ★ Cooling fan and battery are fully guarded.
- ★ Heat insulation of exhaust smoke system inside the canopy.
- ★ Forkman slot is for choice.
- ★ Lifting ear is mounted in the base frame.


## Weight and Dimensions

### 1. Open Version:

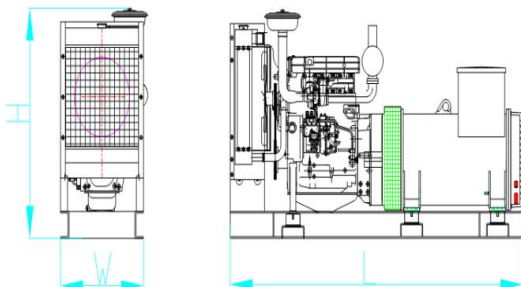

Open Type (Standard Configuration)  
Overall Size: 2600×950 ×1600mm(L\*W\*H)  
Weight: 1825kg

### 2. Soundproof Version:

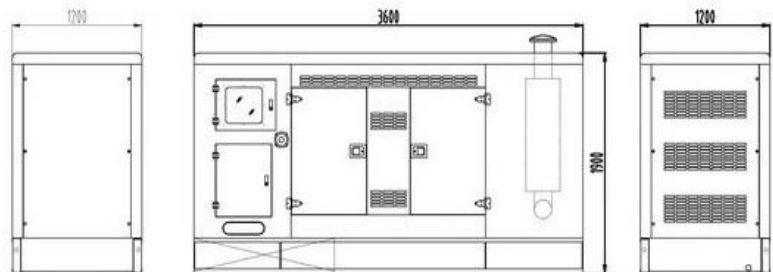

Soundproof Type  
Overall size: 3600× 1200×1800mm(L\*W\*H)  
Weight: 2525kg



# DATA SHEET

The power for the better life

**DIESEL GENERATOR SET**  
**50Hz/1500 rpm**

---