


VGM1900S

Standby power : 1900KVA/1520KW

Prime power : 1728KVA/1382KW

Standard features

- Engine : MITSUBISHI , S16R-PTA
- Charge alternator : 24V
- Governor : Electronic
- Alternator : STAMFORD , PI 734E
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

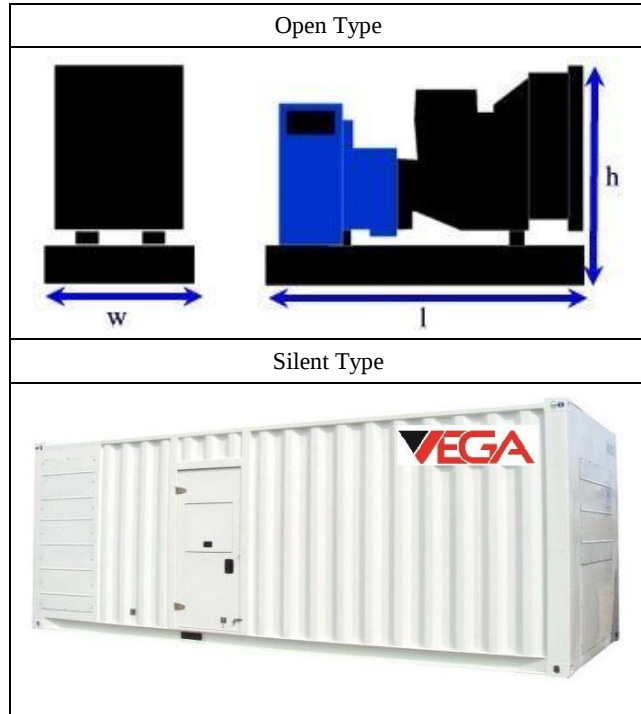

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	5330 mm×2180 mm×2518mm	13616 kg
Silent Type	12192mm×2438mm×2896mm	20566 kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	2743	1900/1520	1728/1382

Engine Data

Manufacturer/Model	MITSUBISHI S16R-PTA 4-cycle
Cylinder /Arrangement	16 / 60° V
Displacement	65.37 L
Bore and Stroke	170 mm×180 mm
Compression ratio	14.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1620 KW
Frequency regulation , steady state	±0.25 %
Governor : type	Electronic

Exhaust System

Exhaust gas flow	339 m ³ /min
------------------	-------------------------

Exhaust temperature	520°C
---------------------	-------

Max back pressure	600mm H ₂ O
-------------------	------------------------

Fuel System

Fuel consumption 100% (of the Prime Power)	332 L / h
--	-----------

Oil system

Total oil capacity w/filters	230 L
------------------------------	-------

Air intake

Engine air flow	128 m ³ /min
-----------------	-------------------------

Coolant System

Radiator & engine capacity	350 L
Max water temperature	98°C
Thermostat	71-85°C

Alternator Data

Manufacturer / Type	STAMFORD PI 734E
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEEPSA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.