


VGC880S

Standby power : 880KVA/704KW

Prime power : 810KVA/648KW

Standard features

- Engine : CUMMINS , QSK23-G3
- Charge alternator : 24V
- Governor : ECM
- Alternator : STAMFORD , HCI634G
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

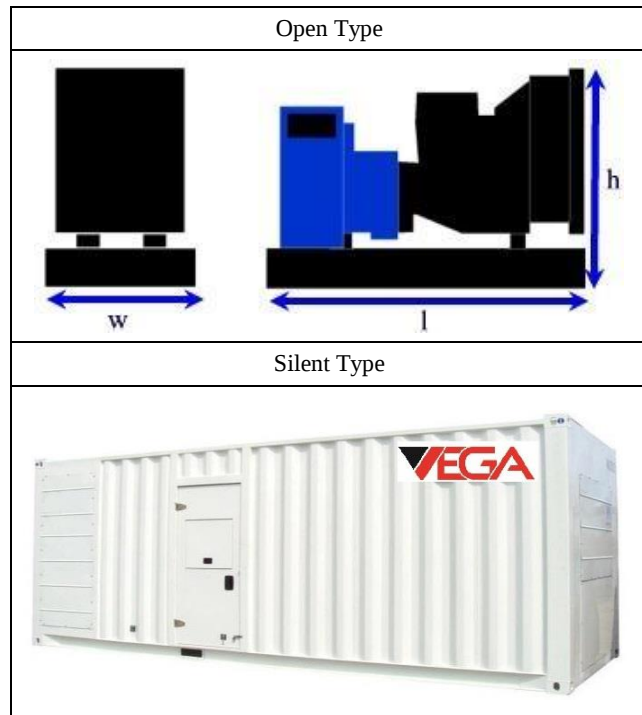

Weight and Dimensions

GEN-Set	Dimension (L×W×H)	Weight
Open Type	4072mm×1559mm×2122mm	5716 Kg
Container Type	6058mm×2438mm×2591mm	8896Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	1270	880/704	810/648

Engine Data

Manufacturer/Model	CUMMINS QSK23-G3 4-cycle
Cylinder /Arrangement	6 / L
Displacement	23.15 L
Bore and Stroke	170 mm×170 mm
Compression ratio	16.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	768KW
Frequency regulation , steady state	≤ 1%
Governor : type	ECM

Exhaust System

Exhaust gas flow	2463 L/s
Exhaust temperature	543°C
Max back pressure	76.2 mmHg

Fuel System

Fuel consumption 100% (of the Prime Power)	161 L / h
--	-----------

Oil system

Total oil capacity w/filters	95 L
------------------------------	------

Air intake

Engine air flow	888 L/s
-----------------	---------

Coolant System

Radiator & engine capacity	46.5 L
Max water temperature	104°C
Thermostat	76.5-90°C

Alternator Data

Manufacturer / Type	STAMFORD / HCI634G
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.